


# Ceramic Filters



## General Specifications:

- Bandpass or Notch Configurations Available
- Surface Mount or Connectorized
- Application Specific Designs
- Tape and Reel Available
- Suitable for Reflow Applications
- Low Cost
- High Performance
- Single Quantities up to High-Volume Quantities
- Rapid Delivery

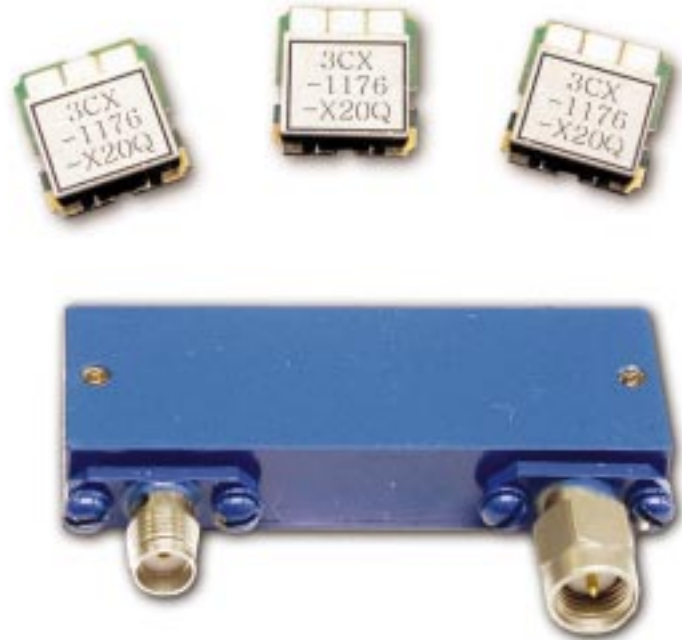

## Electrical Specifications:

Frequency Operation:	300 - 5000 MHz
Percent Bandwidths:	0.1 - 25%
Sections:	2 - 10
Typical VSWR:	≤ 1.5:1
Power:	Consult Factory
Temperature Range:	-55 to +125 °C

**Reactel, Incorporated — Reacting First to Your Filter Requirements**

8031 Cessna Avenue ♦ Gaithersburg, Maryland 20879

Phone: 301-519-3660 ♦ Fax: 301-519-2447 ♦ reactel@reactel.com ♦ www.reactel.com

