


3TP-86/198-11 - VHF Triplexer

3TP-86/198-11

This VHF triplexer makes efficient use of space while exhibiting high channel-to-channel isolation. We can manufacture most any filter or multiplexer you need, please consult the factory with your specific requirements.

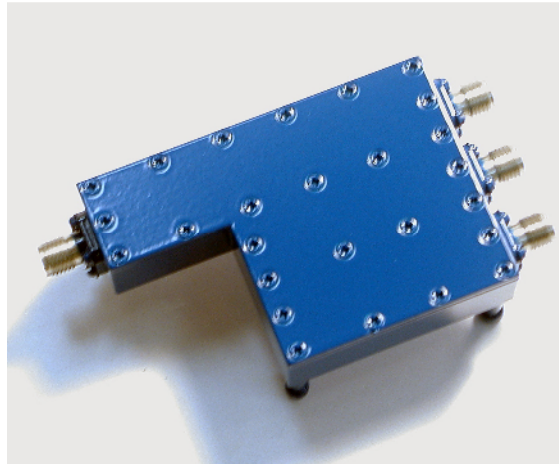

Specifications

Channel 1 Passband	30 – 88 MHz, minimum
Channel 2 Passband	100 – 172 MHz, minimum
Channel 3 Passband	225 – 400 MHz, minimum
Insertion Loss	≤ 2.5 dB @ Band-edges
VSWR	≤ 1.5:1 @ Passbands
Channel 1-to-Channel 2 Isolation	≥ 30 dB
Channel 2-to-Channel 3 Isolation	≥ 50 dB
Channel 1 & Channel 2 Power	100 W
Channel 3 Power	200 W
Connectors	SMA Female, all ports



Reactel, Incorporated - Reacting First to Your Filter Requirements

8031 Cessna Avenue ▪ Gaithersburg, Maryland 20879

Phone: 301-519-3660 ▪ Fax: 301-519-2447 ▪ reactel@reactel.com ▪ www.reactel.com