


Ceramic Filters



General Specifications

- Bandpass or Notch Configurations Available
- Surface Mount or Connectorized
- Application Specific Designs
- Tape and Reel Available
- Suitable for Reflow Applications
- Low Cost
- High Performance
- Single Quantities up to High-Volume Quantities
- Rapid Delivery

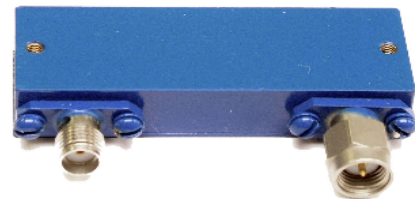

Electrical Specifications

Frequency of Operation	300 - 5000 MHz
Percent Bandwidths Available	0.1 - 25%
Number of Sections Available	2 - 10
Typical VSWR	$\leq 1.5:1$
Power	Consult Factory
Temperature Range	-55 to +125 °C

Reactel, Incorporated - Reacting First to Your Filter Requirements

8031 Cessna Avenue • Gaithersburg, Maryland 20879

Phone: 301-519-3660 • Fax: 301-519-2447 • reactel@reactel.com • www.reactel.com