


Flat Pack Filter



General Specifications

- 1/8" profile (3mm)
- Low Loss
- High Rejection
- Portable
- Light Weight
- Airborne Applications
- Surface Mount Applications

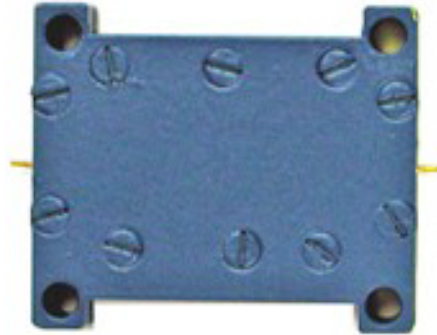

Electrical Specifications

Frequency of Operation	5000 MHz – 20 GHz
Percent Bandwidths Available	10% - 30%
Number of Sections Available	4 – 12
Typical VSWR	$\leq 1.5:1$
Power	Consult Factory

Reactel, Incorporated - Reacting First to Your Filter Requirements

8031 Cessna Avenue • Gaithersburg, Maryland 20879

Phone: 301-519-3660 • Fax: 301-519-2447 • reactel@reactel.com • www.reactel.com